



Disassembling Motorola i90c Internal Backplate

Written By: Grant Glazebrook



INTRODUCTION

This guide details how to remove the internal backplate to expose the speaker, the headphone jack, and the logic board.



TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [T9 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Slide the notch downward while pulling the back cover off to remove it.

Step 2



- Use your fingers to push the battery upward from the bottom.
- Lift upwards to remove the battery.

Step 3 — Antenna

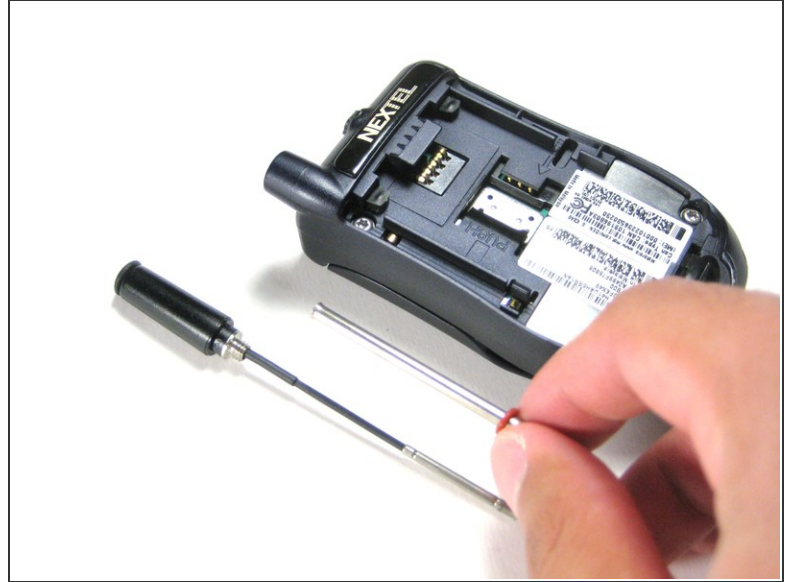


- Unscrew the antenna in a counter-clockwise fashion.
- Remove the aluminum cover.


Step 4 — Internal Backplate



- Unscrew the 3 screws shown.
- Lift up the right part of the Nextel logo and unscrew the screw underneath.



Step 5

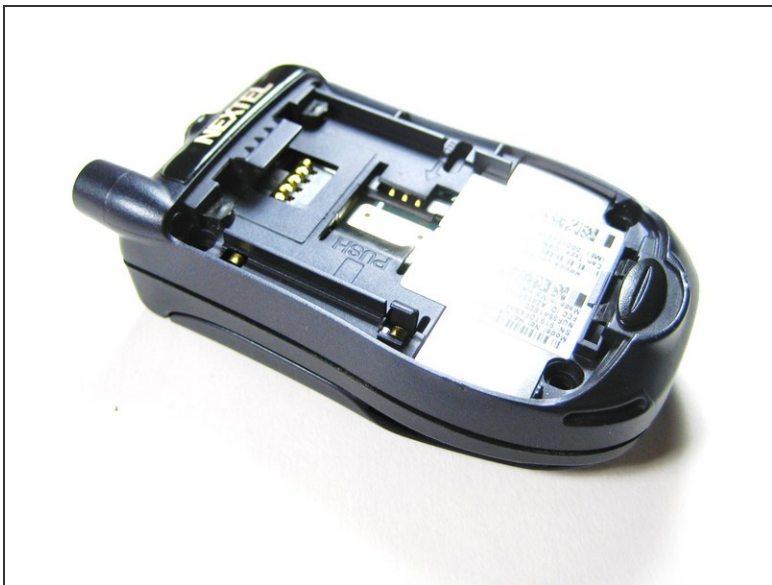

 DO NOT force the cover off as it could damage the ribbon cable!

- Gently lift the back cover off.

Step 6

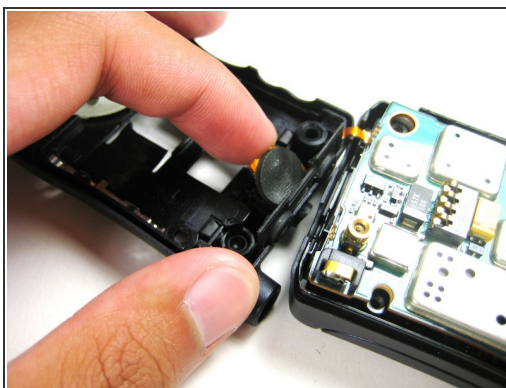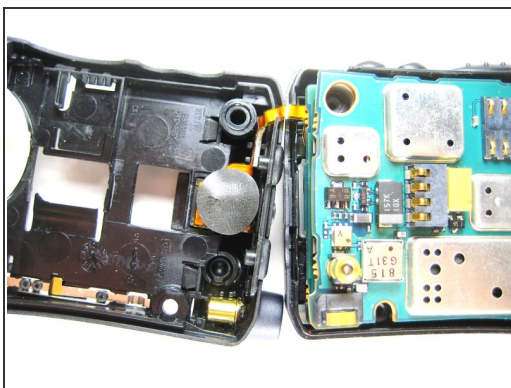

- Carefully pry off the connection between the headphone jack and logic board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 08:19:12 PM.